


DC_VA_EXTERNAL SHUNT

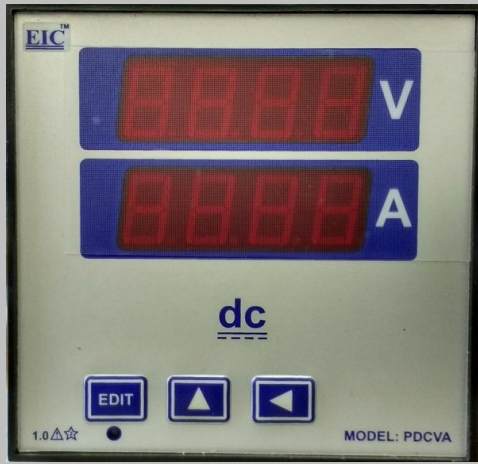

SPECIFICATIONS

- Model: PDCVA
- Input Voltage: 20 -2000Vdc
- Input Current: 2V@200A
- Auxiliary Power Supply: 12V DC (10 V to20V DC)
- Measurement: DC A-V
- Accuracy: +/- 1% of FSD (10 % to 120 % Current range)
- Power Consumption: < 2 Watt at 10 to 20V DC
- Operating Temperature: 10°C to 55° C
- Relative humidity: 55% to 85%.
- Weight: 250 Grams (Approx.)
- Compact size: 96mm x 96mm x 45mm
- Panel cutout size: 92mm x 92mm
- Sensor ID: 40/42mm