


EARTH LEAKAGE RELAY

SPECIFICATIONS



- Current Settings Programmable from 1A to 12A
 - Time Setting Programmable 0.1Sec TO 30sec
* 3-Digit 7-segment Display. 14.2mm height.
 - 1 or 2 Relay Output
 - Microcontroller Based. Inverse Current feature
 - Auxiliary supply: 110VAC /230VAc /440VAC $\pm 10\%$ VAC
 - Compact size of 96mm x 96mm x 45mm
 - Panel cutout size: 92mm x 92mm
 - Auto scaling
 - Accuracy
 - : 1.0% for Current.
 - : 50msec for Time
- CBCT Standard size: 100mm ID. (Other size in rectangle and round: Optional)

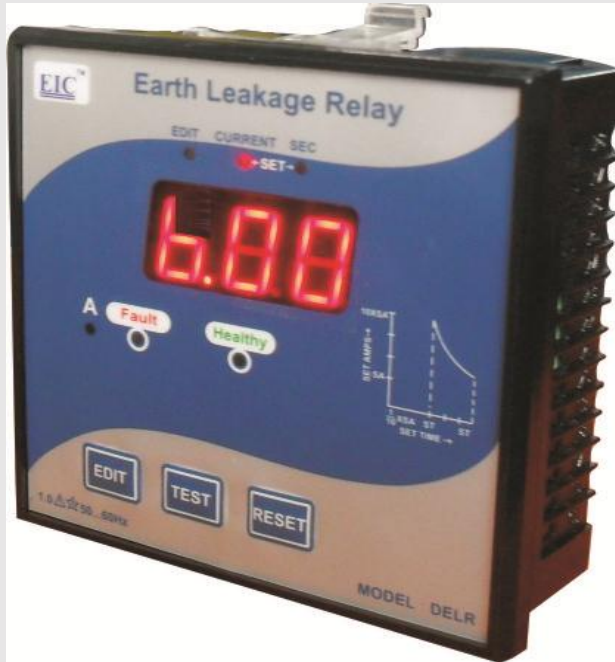

- Current Settings switches from 1A to 8A in steps of 1A
 - Time Setting switches 0.15Sec, 0.25Sec, 0.50Sec, 1.00Sec, 2.00Sec, 3.00Sec and 5.00Sec.
 - 1 or 2 Relay Output
 - Microcontroller Based
 - Auxiliary supply: 110VAC /230VAc /440VAC $\pm 10\%$ VAC
 - Compact size of 96mm x 96mm x 45mm
 - Panel cutout size : 92mm x 92mm
 - Auto scaling
 - Accuracy
 - : 1.0% for Current.
 - : 50msec for Time
- * CBCT Standard size: 100mm ID. (Other size in rectangle and round : Optional)