


3-1/2 DIGIT DC AMMETER

Size:96/96/45mm



Size:48/96/60mm

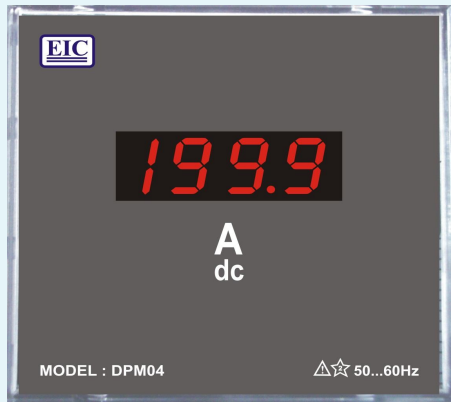

Ranges	:	0-199.9μA, 0-1.999mA, 0-19.99mA,0-199.9A, 0-19.99A External Shunt operated Ammeter also available
Accuracy	:	$\pm(0.5\%$ of rdg.+5counts)
Display	:	14.2mm LED Red (or) Optional Green. (25mm Display for 144 x144 & 72 x144 Meter)
Auxiliary Power Supply	:	230V \pm10% @50Hz (Optional: 12V,24V,48V,230V DC)
Power Consumption	:	< 2 Watt
Meter Size	:	Plastic Housing for FR Grade Material a)96mm x 96mm x 45mm (Cut out Size:92/92mm) b)48mm x 96mm x 60mm (Cut out Size:44/92mm) c)144mm x 144mm x 40mm (Cut out Size:138/138mm) d)72mm x 144mm x 45mm (Cut out Size:68/138mm)
Input impedance	:	>1MΩ
Operating Temperature	:	10°C to 55° C
Relative humidity	:	0-- 90%.